



ASFAFWA

cement company

is a member of ELKHAJANAT group

FC SUPER

JODDRAN SUPER PORTLAND CEMENT

42.5N



FC SUPER

It is an innovative cement solution. It is the solution for its stability when it is feathered and smooth in finishing. It is guaranteed quality cement that meets the specifications of ASTM C 1157 Type GU

SPECIFICATIONS

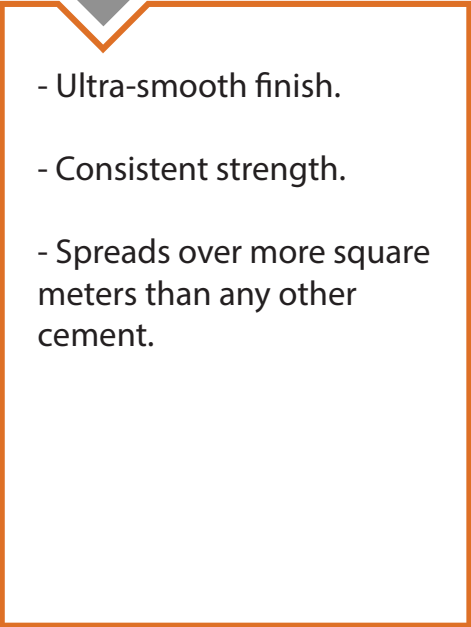
Physical Parameters	Jodran Super	Standard Requirement
3 Days Strength MPa	24.50	NA
7 Days Strength MPa	33.76	NA
28 Days Strength MPa	48.64	NA
Initial Setting Time (Minutes)	179	45 minutes Min
Final Setting Time (Minutes)	225	NA

JODDRAN SUPER

APPLICATIONS

- 01 Plastering: steady plaster and smoother finish.
- 02 Laying and filling of concrete hollow blocks, bricks and other types of masonry units.
- 03 Used in tiles installation.

PROPERTIES

- 
- Ultra-smooth finish.
 - Consistent strength.
 - Spreads over more square meters than any other cement.

CONDITIONS OF USE

The cement content must be correct and the water cement ratio as desired results possible consistent with satisfactory placing, thorough compaction and effective curing.

The final results quality of this material will depend upon the operative having the required skills and a familiarization with the material and its application methods.

Concrete, Mortar and Grouts containing Masonry Bulk must be specified and used correctly for best performance.



Innovation .. For Better Tomorrow



@Alsafwacement

 www.safwacc.com